

Harvey-Foil® Extra Light Duty (110)

Product applications

Harvi-Foil® Extra Light Duty (110) is a double sided reflective foil laminate recommended for use in non critical residential applications as a –


- Thermal insulating material
- Vapour barrier for suspended floors

Harvi-Foil® products should not be used where fire retardant properties are required.

Features and Benefits

- Albar® on one side to provide one scuff resistance face
- Two-way fibreglass reinforcement for strength and edge tear resistance
- Highly reflective to enhance lighting conditions
- Low emissivity to limit heat loss
- Manufactured with pure aluminium foil to provide an effective barrier against vapour

Technical Data

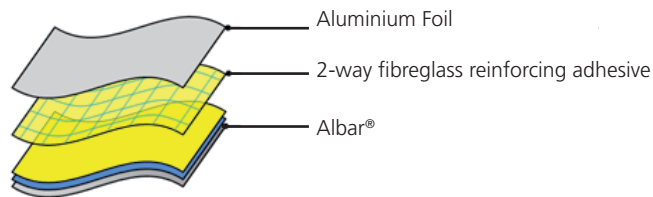

Physical Property Classifications in Accordance with AS/NZS4200.1

Characteristics	Results	Characteristics	Results
Duty Classification	Extra Light Duty	Resistance to dry delamination	Pass
Vapour Barrier	High (≥ 450 MN s/g)	Resistance to wet delamination	Pass
Emittance (Al Face)	Reflective (≤ 0.05)	Folding Endurance	Pass
Water barrier	High	Tensile strength (kN/m)	M.D ≥ 6.0 C.D ≥ 3.5
Flammability index	Unclassified	Edge tear resistance	≥ 30
Shrinkage	Pass		

The physical properties of Harvi-Foil® (110) have been tested by independent accredited laboratories. The nominal results are typically representative of performance.

Test reports are available on request.



Harvey-Foil® Extra Light Duty (110)

Green Star Compliant

FRAMECAD® is committed to providing environmentally sustainable products. Our Insulation products have Zero Ozone Depleting Potential in both manufacture and composition, complying with the GreenStar Insulant ODP Emissions credit requirement. Air quality during manufacture is maintained with total Volatile Organic Compound (VOC) emissions below quantifiable levels.

Thermal Performance

When used in conjunction with an airspace, Harvi-Foil® Extra Light Duty (110) is an effective thermal insulation material due to the high reflectivity and low emissivity of its aluminium foil surfaces. The contribution of this product to Total R-value depends on installation and environmental conditions which include the effect of dust.

Comprehensive calculations of Total R-values for typical roof systems are illustrated in the ICANZ Insulation Handbook which can be found at www.icanz.org.au

Installation

Harvi-Foil® Extra Light Duty (110) should be installed in accordance with AS/NZS4200.2 "Installation Requirements for Pliable Building Membranes". Install with a 150mm overlap between runs, with each higher run lapping over the layer below. The product must be installed in such a way to prevent water from pooling.

Install external cladding without delay. To be effective as a thermal insulator there must be a minimum air gap of 20mm adjacent to at least one reflective foil face. Installing Harvi-Foil® under the battens is a sure way to achieve the required air space.

Aluminium foil is susceptible to alkali attack and therefore should not come in contact with wet concrete.

Where flame retardant properties are considered important please consult with your local supplier for the correct Sisalation® product to be used in your application.

When specifying, state the following:

Product Name: Harvi-Foil® Extra Light Duty (110) "Harvi-Foil® Extra Light Duty (110) shall be installed as a thermal insulation and/or vapour barrier."

Standard Roll size:

1.35 m x 30m (40.5m²)

1.35 m x 60m (81m²)

