

# FRAMECAD® F325iT




## Leading Innovation

FRAMECAD® has created the world's most efficient design and manufacturing technology for steel trusses and frames. The F325iT System is the intelligent choice for organisations desiring to deliver large scale production and projects. It is fully optimised using patented technology, to give a smart lean production process.

## Advanced Computer Aided Engineering

The FRAMECAD® system integrates with BIM Design software including REVIT and TEKLA. Intelligence built into FRAMECAD® Structure software enables value engineered design to maximise both profitability and robust buildings.

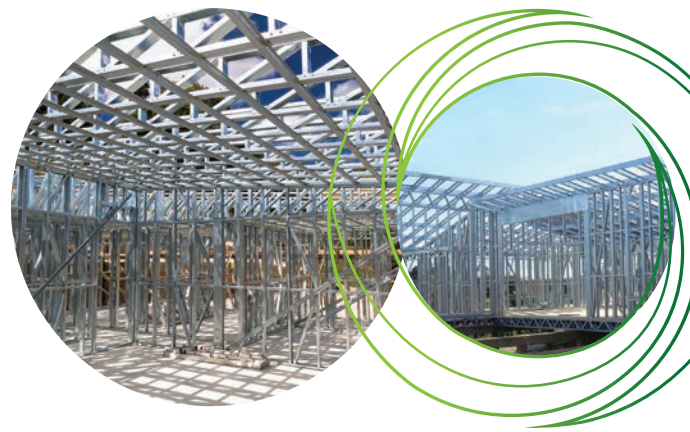

## The F325iT Manufacturing System offers:

- The F325iT produces wall frames, trusses and joists for residential and light commercial building quickly economically up to G+2.
- High line speed up to 2880m/hr results in the industry's best framing and truss manufacturing output.
- 12 advanced hydraulic and punching functions for high productivity and versatile components production such as roof trusses, walls and floor joists.
- An autogauging system that automatically adjusts gauge range to increase overall productivity for steel thickness from 0.55 -1.20mm.
- Includes hot climate hydraulic cooling system for high temperature operating environments.
- Smart Internet connectivity provides cloud-based data reporting to enable real time production management and technical diagnostics to improve efficiency.
- Qualified international technical support & training experts.

## F325iT System Specifications

Description	FRAMECAD® Frame & Truss Plant
Number of Profiles	1 x C and 1 x U
Profile Width (Web)	Range 63-150mm (2.5"-6") & 89mm or 3.625" standard
Profile Height (Flange)	Range 34 - 50mm - 41/39 Boxable Section standard
Material Thickness	0.55 - 1.2mm (24-18 gauge)
Roll Forming Stations	13 Auto Gauging stations
Tooling Stations	12 Frame and Truss tooling stations
Standard Tooling*	Service Hole, Web Bolt Hole, Dimple, Web Notch, Chamfer, Lip Cut, Flange Holes (left & right), Swage, Shear. (options to add Flange cut left and right)
Max Line Speed	2,880m/hr (9,950ft/hr)
Typical Production Speed (actual dependent on framing design)	Joists: 300 m/hr (985 ft/hr) Walls: 700 m/hr (2,300 ft/hr)
Printer	2 Printer Heads

Design Software Options	FRAMECAD® Structure and FRAMECAD® Detailer
Machine Control Software	FRAMECAD® Factory 2
Main Drive Power	7.5kW (10hp)
Hydraulic Power	5.5kW (7.4hp)
Hydraulic Reservoir	80L (17 imp gal)
Ambient Temperature	0-40°
Width	800mm (2.65')
Length	3,700mm (12.15')
Height - to top of covers	1200mm (3.95')
Approx Weight	1,820kg (4,012lb)
Mains Power Supply	400VAC, 25A
User Interface	21.5" Touch Screen
Decoiler Capacity	3,000kg (6,600lb) powered decoiler

\*Subject to customer System specification. Due to FRAMECAD®'s ongoing innovation, system specification may change.

For more information, details or a quote, please contact us at: [framecad.com/contact-us](http://framecad.com/contact-us)